


# T-1 Series Circuit Breakers

| PN<br>Panel<br>Mount | PN<br>Surface<br>Mount | Description                 |
|----------------------|------------------------|-----------------------------|
| 7020                 | 7120                   | T-1 Circuit Breaker 25 Amp  |
| 7021                 | 7121                   | T-1 Circuit Breaker 30 Amp  |
| 7022                 | 7122                   | T-1 Circuit Breaker 35 Amp  |
| 7023                 | 7123                   | T-1 Circuit Breaker 40 Amp  |
| 7024                 | 7124                   | T-1 Circuit Breaker 50 Amp  |
| 7025                 | 7125                   | T-1 Circuit Breaker 60 Amp  |
| 7026                 | 7126                   | T-1 Circuit Breaker 70 Amp  |
| 7027                 | 7127                   | T-1 Circuit Breaker 80 Amp  |
| 7028                 | 7128                   | T-1 Circuit Breaker 90 Amp  |
| 7029                 | 7129                   | T-1 Circuit Breaker 100 Amp |
| 7030                 | 7130                   | T-1 Circuit Breaker 110 Amp |
| 7031                 | 7131                   | T-1 Circuit Breaker 120 Amp |
| 7032                 | 7132                   | T-1 Circuit Breaker 135 Amp |
| 7033                 | 7133                   | T-1 Circuit Breaker 150 Amp |

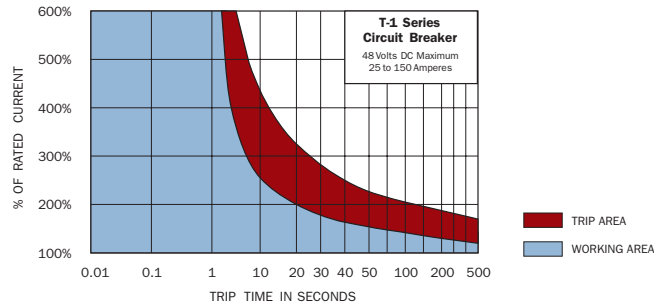

## Thermal Circuit Breakers

### Thermal Circuit Breakers


- Vapor Proof (conforming to SAE J1171)—safe for installation aboard gas-powered boats
- Waterproof
- Combines switching and circuit breaker function into one unit
- “Trip Free”—cannot be held closed after trip

#### Specifications

|                      |                                                                  |
|----------------------|------------------------------------------------------------------|
| Interrupt Capacity   | 3000 Amperes                                                     |
| Circuit Breaker Type | Thermal                                                          |
| Body Material        | Phenolic                                                         |
| Maximum Voltage      | 30 Volts DC                                                      |
| Weight               | 0.24 Lb / 0.11 Kg Panel Mount<br>0.30 Lb / 0.14 Kg Surface Mount |

| PN<br>Panel<br>Mount | PN<br>Surface<br>Mount | Description             |
|----------------------|------------------------|-------------------------|
| 7005                 | 7105                   | Circuit Breaker 40 Amp  |
| 7000                 | 7100                   | Circuit Breaker 50 Amp  |
| 7001                 | 7101                   | Circuit Breaker 75 Amp  |
| 7002                 | 7102                   | Circuit Breaker 100 Amp |
| 7003                 | 7103                   | Circuit Breaker 125 Amp |
| 7004                 | 7104                   | Circuit Breaker 150 Amp |

|      |                                          |
|------|------------------------------------------|
| 7198 | Mounting Bezel for 700x Circuit Breakers |
| 7199 | Mounting Panel for 700x Circuit Breakers |

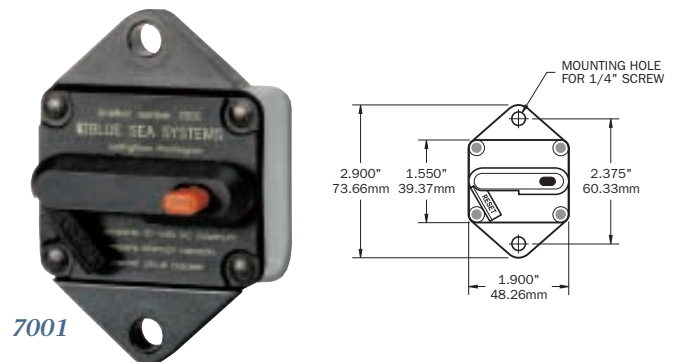

7100

